

EO sensor specifications and Planning

A.V Ramani
NDC, NRSC

Operational IRS satellites for planning

1. Resourcesat 2 , Resourcesat 2A
2. Cartosat 2E
3. CARTOSAT 3
4. EOS 4

IRS Satellites not offered for planning

1. Resourcesat 1
2. Oceansat 2

Operational Non - IRS satellites for planning

1. NOVASAR

Non IRS Satellites not offered for planning

1. Landsat
2. Sentinel


Upcoming Satellite : EOS 6

EO sensor specifications and Planning

Resourcesat - 2/2A

| Sensors | AWiFs, LISS-4, LISS-3 |
|--------------------------|--|
| Equatorial Crossing Time | 10:30 AM \pm 10 min (at descending node) |


| SPECIFICATIONS | LISS-4 | LISS-3 | AWiFS |
|--------------------------|---|--|--|
| Resolution (m) | 5.83m | 23.5m | 56m |
| Swath (km) | 70 / 23 | 140 | 740 |
| No. of Bands | 1 (Mono); 3 (MX) | 4 | 4 |
| Spectral Bands (μ) | B2: 0.52 – 0.59 B3: 0.62 – 0.68 B4: 0.77 – 0.86 B3-default band for Mono | B2: 0.52 – 0.59 B3: 0.62 – 0.68 B4: 0.77 – 0.86 B5: 1.55 – 1.70 | B2: 0.52 – 0.59 B3: 0.62 – 0.68 B4: 0.77 – 0.86 B5: 1.55 – 1.70 |
| Revisit (days) | 5 | 24 | 5 |

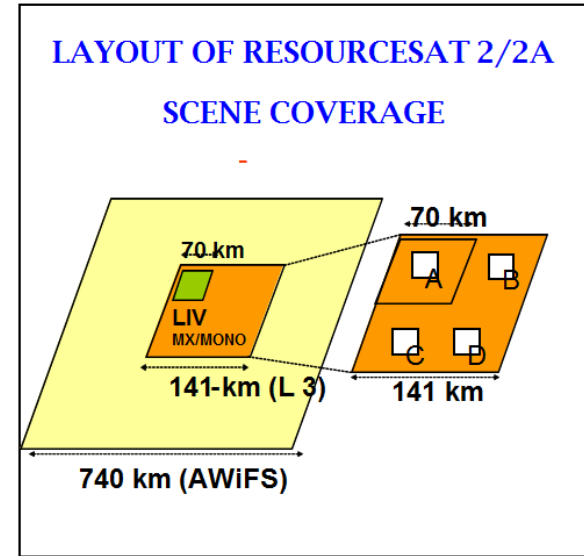


EO sensor specifications and Planning

Resourcesat - 2/2A

- ✓ Resourcesat-2A has been phased with Resourcesat-2 which resulted in improved reptivity
- ✓ Resourcesat-2 and 2A data are being collected over Shadnagar visibility cone in a systematic manner
- ✓ The combined systematic acquisition of Resourcesat-2 and Resourcesat -2A facilitated in covering the Shadnagar visibility region
 - ✓ 24 days using LISS-IV FMx
 - ✓ 12 days with LISS-III
 - ✓ 4 days with AWiFs
- ✓ Systematic collection of global LISS-3, AWiFS and LISS-IV data has been carried out using the two satellites.
- ✓ LISS III and AWiFs are planned over Antarctica every year during October to March
- ✓ User requests globally outside the shadnagar visibility cone will be accepted for all three sensors and planned based on their feasibility

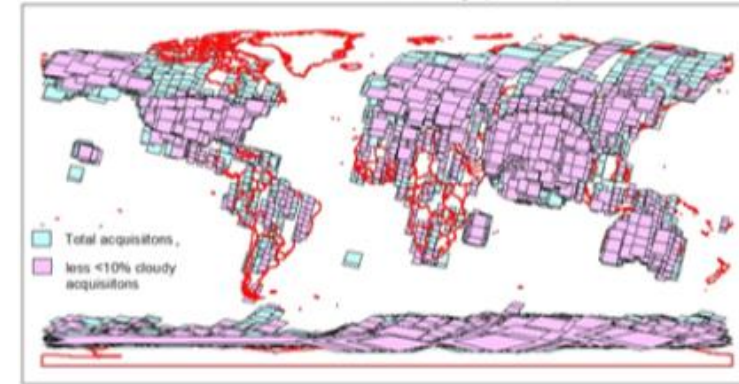

AWiFS coverage

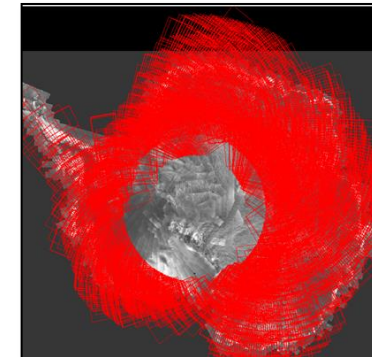


Antarctica – AWiFS coverage


EO sensor specifications and Planning

Cartosat – 2E

| | |
|--------------------------------|------------------------------|
| Orbit Type | Polar, Sun Synchronous (SSO) |
| Orbit Height (Km) | 505 Km |
| Orbit Inclination (deg.) | 97.44 deg. |
| Local Time of Equator Crossing | 9:30 am |

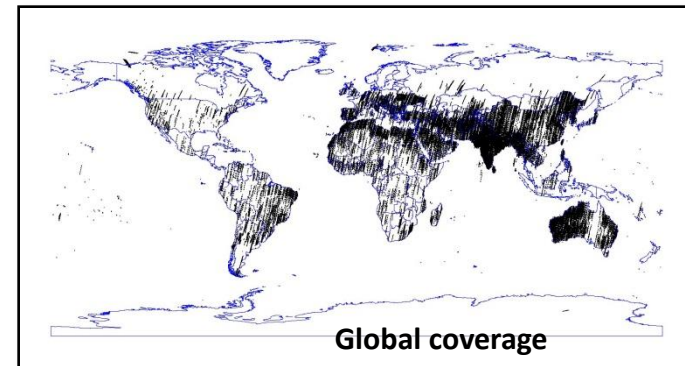

| PARAMETERS | PAN | MULTISPECTRAL |
|--------------------------------------|------------|--|
| Ground Sampling Distance (GSD) | 0.65 m | better than 2m |
| Swath | 9.6 Km | 9.6 Km |
| Spectral Bandwidth (μm) | 0.45 - 0.9 | B1:0.45 - 0.52 B2:0.52 - 0.59 B3:0.62 - 0.68 B4:0.77 - 0.86 |
| Quantisation | 11 Bits | 11 Bits |

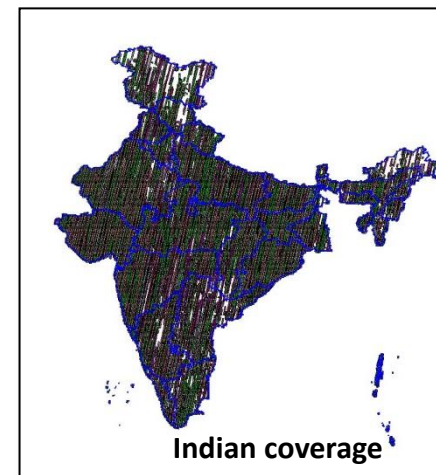

EO sensor specifications and Planning

Cartosat – 2E

Request based planning:

User need to specify the following

Area of interest

- ✓ Point – 70 Km will be acquired on the either side of the given point (NS /AT)
- ✓ Strip
 - ✓ a maximum of 800 km strip length will be acquired.(Along track)
 - ✓ a maximum of 200 km strip length will be acquired.(NS)
- ✓ Polygon and shape file request (internally converted to point or strip request).

Period of interest


- ✓ Required period of interest
- ✓ Preferable cloud free period

Accepted Roll tilt

(+/- 23° is possible)

Possibilities :


- ✓ Every 5/6 day possibility
- ✓ Repitivity is 93 days
- ✓ AOI coverage (with proper side laps between strips) – 279 days

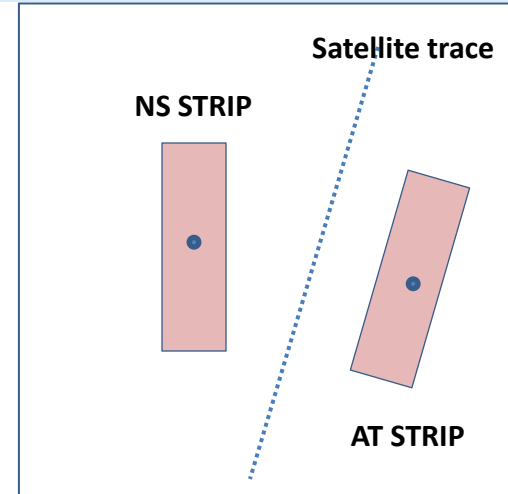


EO sensor specifications and Planning

Cartosat – 3

| | |
|--------------------------------|------------------------------|
| Orbit Type | Polar, Sun Synchronous (SSO) |
| Orbit Height (Km) | 505 Km |
| Orbit Inclination (deg.) | 97.42 deg. |
| Local Time of Equator Crossing | 9:30 am |

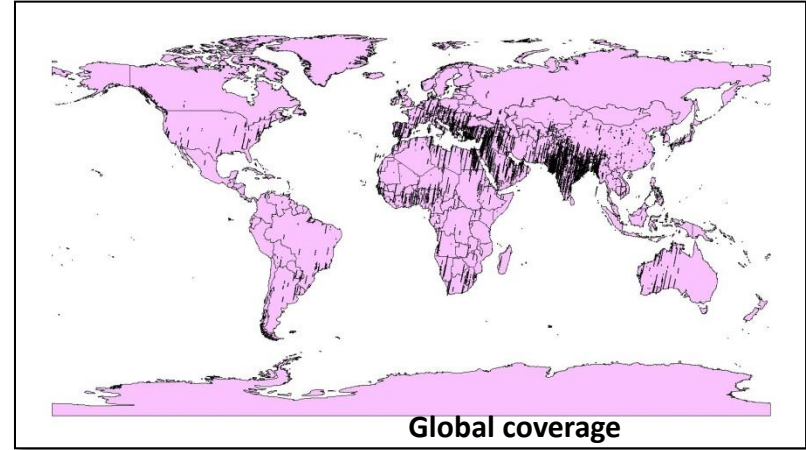

| PARAMETERS | PAN | MULTISPECTRAL |
|--------------------------------|------------|--|
| Ground Sampling Distance (GSD) | 0.28 m | 1.12 m |
| Swath | ~17 Km | ~17 Km |
| Spectral Bandwidth (µm) | 0.45 - 0.9 | B1:0.45 - 0.52 B2:0.52 - 0.59 B3:0.62 - 0.68 B4:0.77 - 0.86 |
| Quantisation | 11 Bits | 11 Bits |

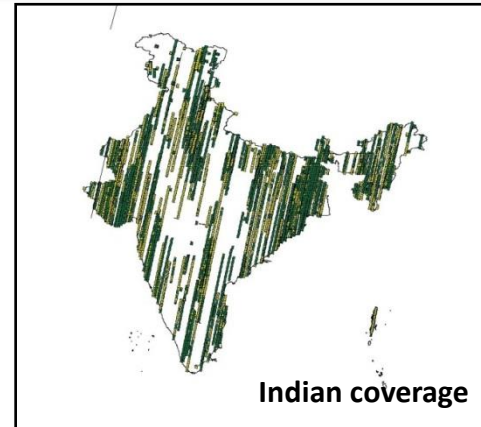

EO sensor specifications and Planning

Cartosat – 3

Request based planning:

User need to specify the following

Area of interest

- ✓ Point – 27 Km will be acquired on the either side of the given point (AT)
- ✓ Strip
 - ✓ a maximum of 2000 km strip length will be acquired.(Along track)
- ✓ Polygon and shape file request (internally converted to point or strip request).

Period of interest

- ✓ Required period of interest
- ✓ Preferable cloud free period

Accepted Roll tilt

(+/- 23° is possible)

Possibilities :

- ✓ Every 5/6 day possibility
- ✓ Repitivity is 93 days
- ✓ AOI coverage (with proper side laps between strips) – 186 days

EO sensor specifications and Planning

EOS -4

Salient Features of EOS - 04

| Sl.No. | Parameters | Coarse Resolution mode (12 beam) | Medium Resolution Mode(8-beam) | Fine Resolution Mode (FRS-1) | High Resolution Mode (Spot mode) |
|--------|-----------------------------|----------------------------------|--------------------------------|------------------------------|----------------------------------|
| 1 | Altitude (Km) | 524.87 | | | |
| 2 | Inclination (Deg) | 97.5 ° | | | |
| 3 | Repeativity (days) | 17 | 17 | 139 | -- |
| 4 | Orbit period (minutes) | 95 | | | |
| 5 | Swath (Km) | 223 | 160 | 25 | 10 |
| 6 | Azimuth Resolution (metres) | 50 | 33 | 3 | 1 |
| 7 | Local Time (IST) | 6:00 AM/PM (±10 min) | | | |

EO sensor specifications and Planning

EOS -4

Payload Modes, Specifications

| Imaging Modes | Swath in Km | Polarization | Resolution (Azi. x Sl Rng.) (metres) |
|---------------|-------------|------------------------|---|
| FRS-1 | 25 | Single, Dual, Circular | 3 x 2 |
| FRS-2 | 20 | Full Pol | 3 x 4 |
| MRS 6-Beam | 115 | Single, Dual, Circular | 25 x 8 |
| MRS 8-Beam | 160 | Single, Dual, Circular | 33 x 8 |
| CRS | 223 | Single, Dual, Circular | 50 x 8 |
| HRS | 15 | Single, Dual, Circular | 1 x 2 |

Descending mode :

Systematic coverage over India

- ✓ MRS mode
- ✓ 8 beam
- ✓ 17 day repevity
- ✓ Dual Polarization
- ✓ Right look

Ascending mode :

User Requests

- ✓ Any mode
- ✓ Any look
- ✓ India/Globe
- ✓ Poles upto 80°
- ✓ Any polarization

EO sensor specifications and Planning NOVASAR

•Operating Modes :

| Modes | ScanSAR | Maritime Surveillance | Stripmap | ScanSAR (Wide) |
|-----------------------------------|---------|-----------------------|----------|----------------|
| Swath (km) | 100 | >400 | 15-20 | 140 |
| Spatial Resolution (m) | 20 | 6 X 13.7 | 6 | 30 |
| Revisit frequency for SSPO (Days) | 4 | 1.8 | 3.6 | 3.1 |
| Incidence Angle (Deg) | 16-30 | 34.5-57.3 | 16-31 | 14-32 |



Polarization :

- ✓ Single – Strip map, Maritime & Scansar
- ✓ Dual & Tripol – Scansar

Incidence Angle :

Only discrete Incidence Angles are available for all the modes of operation


User can place the request any where on India by specifying area of interest, Period of interest, mode, I. angle & polarization

EO sensor specifications and Planning

Landsat 8 & 9

Based on Orbital calendar of Landsat 8 & 9 all possible paths over India will be acquired.

Acquisition Calendar

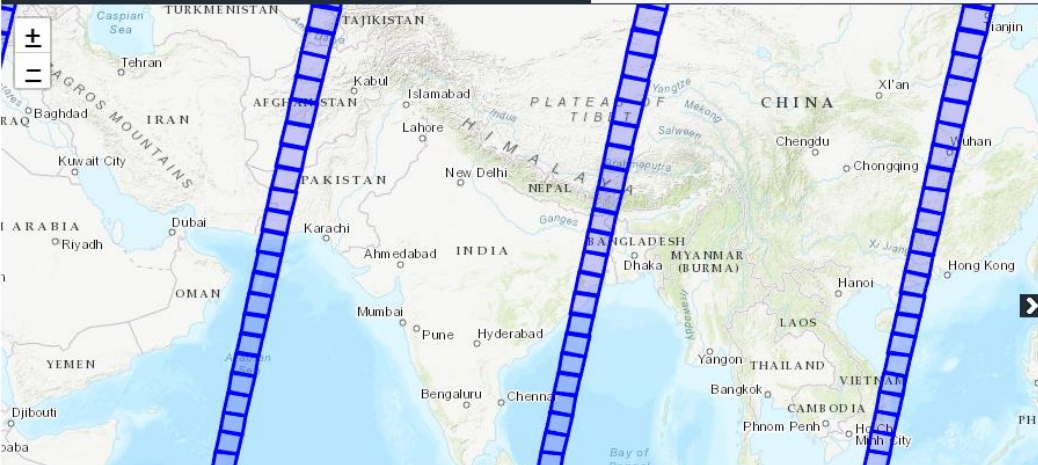

Pending Acquisitions

Convert Path/Row - Lat/Long

View Landsat 8 or 9 paths scheduled for acquisition on any day. Select a satellite. Click on the date you want to view. The paths for that date appear in a list below and on the map.

Legend: ■ Ascending ■ Descending

Select Satellite

Landsat 9 Landsat 8

Choose Node

Descending (daytime)
 Ascending (nighttime)
 Both

16 Day Acquisition Calendar


◀
October
▼
2022
▼
▶

| MO | TU | WE | TH | FR | SA | SU |
|----|----|----|----|----|----|----|
| | | | | | 1 | 2 |
| 3 | 4 | 5 | 6 | 7 | 8 | 9 |
| 10 | 11 | 12 | 13 | 14 | 15 | 16 |
| 17 | 18 | 19 | 20 | 21 | 22 | 23 |
| 24 | 25 | 26 | 27 | 28 | 29 | 30 |
| 31 | | | | | | |

EO sensor specifications and Planning Sentinel

Each SENTINEL-1 satellite will be in a near-polar, sun-synchronous orbit, with a 12-day repeat cycle and 175 orbits per cycle. Both SENTINEL-1A and SENTINEL-1B share the same orbit plane with a 180° orbital phasing difference.

A single SENTINEL-1 satellite is potentially able to map the global landmasses in the Interferometric Wide swath mode once every 12 days, in a single pass (ascending or descending). The two-satellite constellation offers a 6 day exact repeat cycle at the equator. Since the orbit track spacing varies with latitude, the revisit rate is significantly greater at higher latitudes than at the equator.

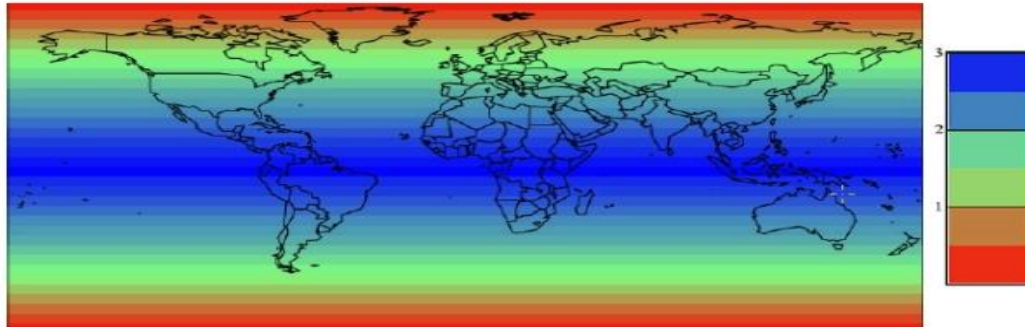

- ✓ Two satellites in a 12 day orbit
- ✓ Repeat frequency: 6 days (important for coherence)
- ✓ Revisit frequency: (asc/desc & overlap): 3 days at the equator, <1 day at high latitudes (Europe ~ 2 days)

Based on Orbital calendar of Sentinel 1A & 1B all possible paths over India will be acquired.

EO sensor specifications and Planning

- ✓ User can give the Satellite wise future planning requirements in " Tasking Proposal forms for IRS " Which will be given as a link for download at bhoonidhi
- ✓ After entering the requirements, the same can be download by user and mail to data@nrsc.gov.in for further planning.
- ✓ User can specify the purpose of request / number of days required to place the request)
 - ✓ Normal (T-5 days)
 - ✓ Urgent (T-1 day)
 - ✓ Calibration
 - ✓ Ground truth (Date specific)
- ✓ **No charges for future planning**

EO sensor specifications and Planning

